

3.3V / 1.25 Gbps InGaAs PIN-TIA Receiver

PT-7330 Series

InGaAs PIN-TIA WITH PIGTAIL

FEATURES

- ◇ InGaAs/InP PIN Photodiode with AGC transimpedance amplifier
- ◇ Differential ended output
- ◇ Single +3.3 V operation
- ◇ Speed up to 1.25 Gbps
- ◇ - 40 ~ +85 °C operation temperature

DESCRIPTION


PT-7330 series are designed as optical signal receivers with AGC transimpedance amplifier. Their wide dynamic ranges, differential outputs are suited for telecommunications, especially Gigabit Ethernet and Fiber Channel.

AC / ELECTRICAL AND OPTICAL CHARACTERISTICS (Tc=25°C)						
Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
	Detection Range		1100	1310	1650	nm
G	Differential Gain	AC coupled, Load=50 Ω	6	8	10	V/mW
BW	Bandwidth	-3 dB point	850			MHz
Psat	Saturation Power	λ =1300nm	-3			dBm
Sens	Sensitivity	BER=10 ⁻¹² @ 1.25 Gb/s			-24	dBm
Rout	Output Resistance		-	50	65	ohm
	Operation Speed			1250		Mbps

DC / ELECTRICAL CHARACTERISTICS (Tc=25°C)					
Symbol	Parameter	Min.	Typ.	Max.	Unit
Vcc	Power Supply	3.15	3.3	3.45	V
Icc	Supply Current (no load)	-	40	60	mA

ABSOLUTE MAXIMUM RATING (Tc=25°C)			
Symbol	Parameter	Value	Unit
V	Voltage	4.5	V
Topr	Operating Temperature	-40~+85	°C
Tstg	Storage Temperature	-40~+85	°C




MECHANICAL DIMENSION (mm) and PIN ASSIGNMENT

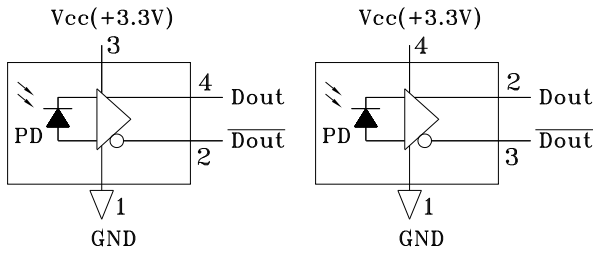




PIN	PIN Assignment	
	TYPE B	TYPE A
1	GND	GND
2	$\overline{\text{Dout}}$	Dout
3	Vcc(3.3V)	Dout
4	Dout	Vcc(3.3V)

TYPE B




TYPE A

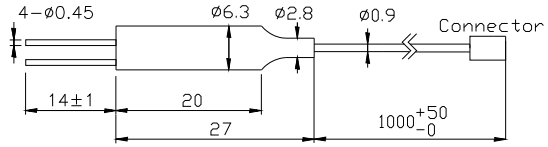

Flangeless

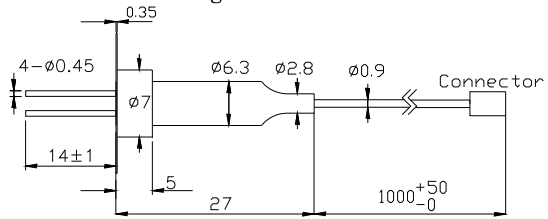

Vertical Flange

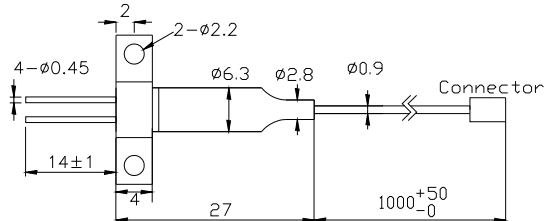

Horizontal Flange

Note: Specifications subject to change without notice.

ORDER INFORMATION

Part No.: P T - 7 3 3 -

Code	Fiber
0	SMF, 9/125 μm
1	MMF, 50/125 μm
2	MMF, 62.5/125 μm

Code	PIN Assignment
Blank	Type A
B	Type B

Code	Flange
V	Vertical
H	Horizontal
X	No Flange

Code	Connector
S	SC/PC
F	FC/PC
T	ST/PC
X	No Connector
SA	SC/APC
FA	FC/APC
TA	ST/APC

Revision History

Version	Subject	Release Date
1.0	Initial datasheet	2002/2/18
2.0	Modify the mechanical dimension and PIN assignment	2009/4/9
