

### SPS-2102WG / SPS-2102BWG / SPS-2102AWG

**(RoHS Compliant)**

### 10 Gb/s / 2 km / 1310 nm Digital Diagnostic SFP+ LC SINGLE-MODE TRANSCEIVER

#### FEATURES

- Up to 10.5 Gb/s Bi-directional Data Links
- Compliant with SFP+ MSA
- **Compliant to 10GBASE-LR Lite (10GBASE-LRL)**
- SFF-8472 Digital Diagnostic Function
- 1310 nm FP LD Transmitter
- AC/AC Coupling according to MSA
- **Distance up to 2 km over SMF**
- Single +3.3 V Power Supply
- RoHS Compliant
- 0 to 70°C Operating: SPS-2102WG
- -10 to 85°C Operating: SPS-2102BWG
- -40 to 85°C Operating: SPS-2102AWG
- Class 1 Laser International Safety Standard IEC-60825 Compliant

#### APPLICATIONS

- High-speed Storage Area Networks
- Computer Cluster Cross-connect
- Custom High-speed Data Pipes
- **10GBASE-LRL and Data Center**

#### DESCRIPTION

The SPS-2102WG series single mode transceiver is a small form factor pluggable module for bi-directional serial optical data communications such as 10GBASE-LR Lite. It is with the SFP+ 20-pin connector to allow hot plug capability. Digital diagnostic functions are available via an I<sup>2</sup>C. This module is designed for single mode fiber and operates at a nominal wavelength of 1310 nm. The transmitter section uses a 1310 nm multiple quantum well laser and is a class 1 laser compliant according to International Safety Standard IEC-60825. The receiver section uses an integrated InGaAs detector preamplifier (IDP) mounted in an optical header and a limiting post-amplifier IC.

#### LASER SAFETY

This single mode transceiver is a Class 1 laser product. It complies with IEC-60825 and FDA 21 CFR 1040.10 and 1040.11. The transceiver must be operated within the specified temperature and voltage limits. The optical ports of the module shall be terminated with an optical connector or with a dust plug.

#### ORDER INFORMATION

P/No.	Bit Rate (Gb/s)	10GBASE	Distance (km)	Wavelength (nm)	Package	Temp. (°C)	RoHS Compliant
SPS-2102WG	10.3	LR Lite	2	1310	SFP+ with DMI	0 to 70	Yes
<b>SPS-2102BWG</b>	10.3	LR Lite	2	1310	SFP+ with DMI	<b>-10 to 85</b>	Yes
<b>SPS-2102AWG</b>	10.3	LR Lite	2	1310	SFP+ with DMI	<b>-40 to 85</b>	Yes

Absolute Maximum Ratings					
Parameter	Symbol	Min	Max	Units	Notes
Storage Temperature	Tstg	-40	85	°C	
Operating Case Temperature	Topr	0	70	°C	SPS-2102WG
		-10	85		SPS-2102BWG
		-40	85		SPS-2102AWG
Power Supply Voltage	Vcc	-0.5	3.6	V	

Recommended Operating Conditions					
Parameter	Symbol	Min	Typ	Max	Units / Notes
Power Supply Voltage	Vcc	3.13	3.3	3.47	V
Operating Case Temperature	Topr	0		70	°C / SPS-2102WG
		-10		85	°C / SPS-2102BWG
		-40		85	°C / SPS-2102AWG
Power Supply Current	I <sub>CC(TX+RX)</sub>		250	300	mA
Data Rate			10.3125	10.5	Gb/s

\*\*\*\*\*

Transmitter Optical Specifications (0°C < Topr < 70°C, 3.13V < Vcc < 3.47V)						
Parameter	Symbol	Min	Typ	Max	Units	Notes
Average Launch Power	PO, Avg	-8		0.5	dBm	1
Optical Modulation Amplitude	PO, OMA	-5.2			dBm	
Output Center Wavelength	λc	1260	1310	1355	nm	
Output Spectrum Width	σλ		2		nm	RMS(σ)
Extinction Ratio	ER	3.5				
Relative Intensity Noise	RIN			-128	dB/Hz	
Average Launch Power of OFF Transmitter				-30	dBm	

1. Output power is power coupled into a 9/125 μm single-mode fiber.


Receiver Optical Specifications (0°C < Topr < 70°C, 3.13V < Vcc < 3.47V)						
Parameter	Symbol	Min	Typ	Max	Units	Notes
Sensitivity	Sen1			-14.4	dBm	2, average received power
Sensitivity in OMA	Sen1			-12.6	dBm	2
Stress Sensitivity in OMA	Sen2		---	-10.3	dBm	3
Receiver Overload	P <sub>MAX</sub>	0.5	---		dBm	
LOS -- Deasserted	LOS <sub>D</sub>	---	---	-16	dBm	Transition: low to high
LOS -- Asserted	LOS <sub>A</sub>	-28	---	---	dBm	Transition: high to low
Wavelength of Operation	λc	1260		1565	nm	
Optical Return Loss	ORL			-12	dB	

2. Measured with worst ER; BER < 10<sup>-12</sup> and PRBS 2<sup>31</sup>-1 at 10.3125 Gb/s..

3. Per IEEE 802.3ae. Equivalent to -13.3 dBm average power at Infinite ER.

Electrical Characteristics						
Parameter	Symbol	Min	Typ	Max	Units	Notes
<b>High-Speed Signal (CML) Interface Specification</b>						
Input Data Rate			10.3125	10.5	Gb/s	
Differential Input Impedance	Rin		100		Ω	
Differential Data Input Amplitude		200		1000	mVpp	Internally AC coupled
Output Data Rate			10.3125	10.5	Gb/s	
Differential Output Impedance	Rout		100		Ω	
Differential Data Output Amplitude		550	660	850	mVpp	Internally AC coupled
<b>Low-Speed Signal (LVTTTL) Interface Specification</b>						
Input High Voltage		2.0		Vcc+0.3	V	
Input Low Voltage		GND		0.8	V	
Output High Voltage		2.4		Vcc	V	
Output Low Voltage		GND		0.5	V	

\*\*\*\*\*  
**CONNECTION DIAGRAM**

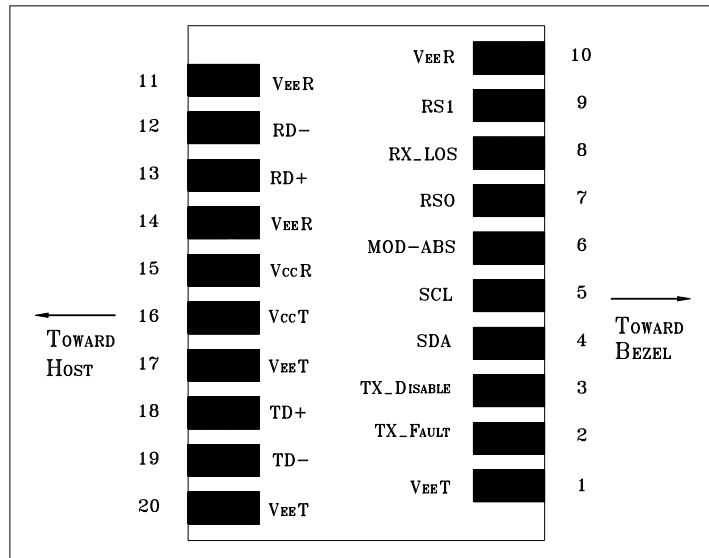


PIN	Signal Name	Description	PIN	Signal Name	Description
1	VEET	Transmitter Signal Ground	11	VEER	Receiver Signal Ground
2	TX_Fault	Transmitter Fault Indication. Logic “1” Output = Laser Fault. Logic “0” Output = Normal Operation	12	RD-	Inverse Receiver Data Out
3	TX_Disable	Logic “1” Input (or no connection) = Laser off, Logic “0” = Laser on.	13	RD+	Receiver Data Out
4	SDA	Modulation Definition 2 – Two wires serial ID Interface	14	VEER	Receiver Signal Ground
5	SCL	Modulation Definition 1 – Two wires serial ID Interface	15	VccR	Receiver Power – 3.3V±5%
6	MOD-ABS	Modulation Definition 0 – Ground in Module	16	VccT	Transmitter Power – 3.3V±5%
7	RS0	RX Rate Select (LVTTL). This pin has an internal 30k pulldown to ground. A signal on this pin will not affect module performance.	17	VEET	Transmitter Signal Ground
8	RX_LOS	Loss of Signal Out (OC).	18	TD+	Transmitter Data In
9	RS1	TX Rate Select (LVTTL). This pin has an internal 30k pulldown to ground. A signal on this pin will not affect module performance.	19	TD-	Inverse Transmitter Data In
10	VEER	Receiver Signal Ground	20	VEET	Transmitter Signal Ground

**MODULE DEFINITION**

Module Definition	PIN 4	PIN 5	PIN 6	Interpretation by Host
4	SDA	SCL	MOD-ABS	Serial module definition protocol

Module Definition 4 specifies a serial definition protocol. For this definition, upon power up, SDA and SCL appear as no connection (NC) and MOD-ABS is TTL LOW. When the host system detects this condition, it activates the serial protocol. The protocol uses the 2-wire serial CMOS E<sup>2</sup>PROM protocol of the ATMEL AT24C01A/02/04 family of components.


## RECOMMENDED CIRCUIT SCHEMATIC

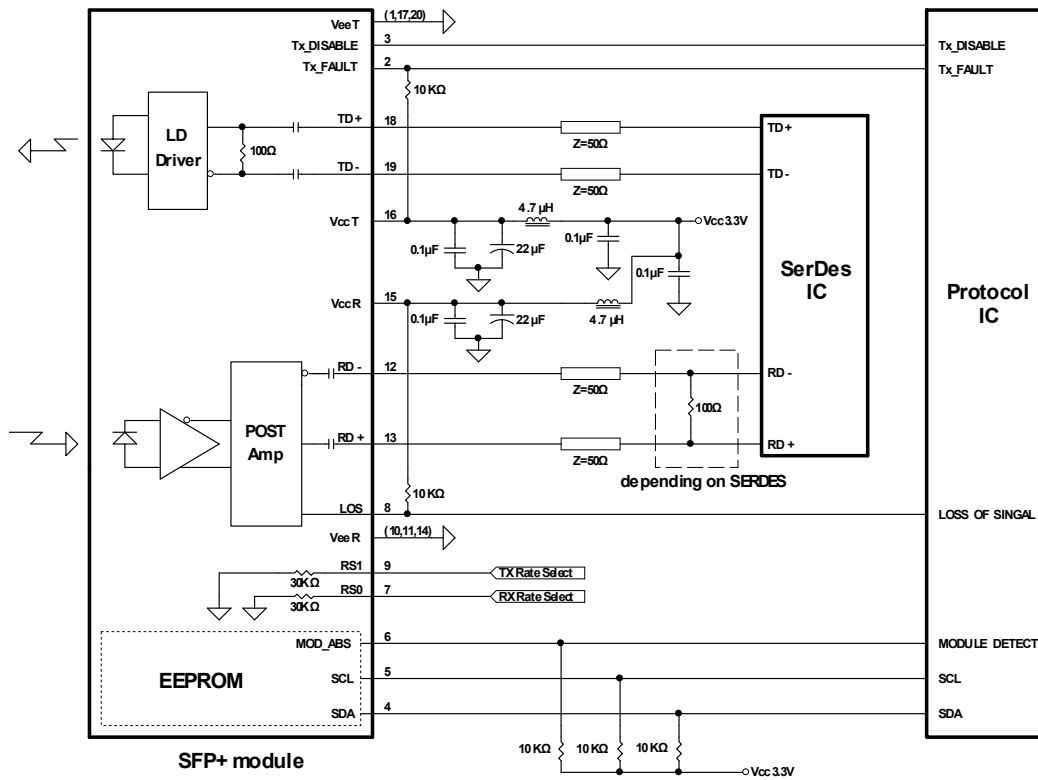


## PACKAGE DIAGRAM

Units in mm


Top View

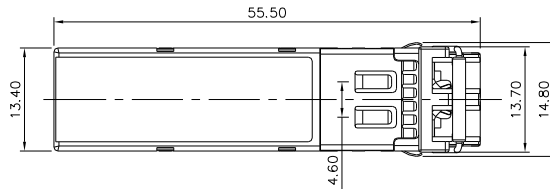

Front View

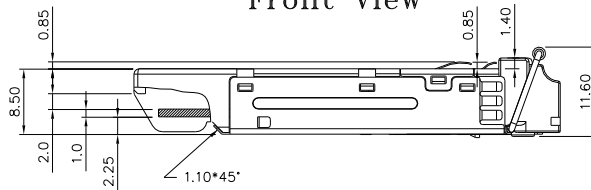


LATCH COLOR  
BLUE : SM



Side View

Bottom View

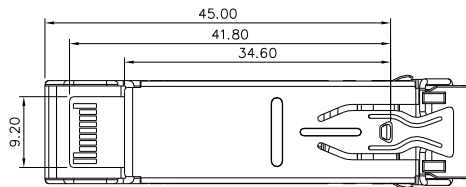

Note: Specifications subject to change without notice.

\*\*\*\*\*  
**REVISION HISTORY**

Version	Subject	Release Date
1.0	Initial datasheet	2014/10/1
1.1	Revised Wavelength spec. as 1260 nm to 1355 nm	2017/12/14